

3Com® SuperStack® 3 Switch 3870 24- and 48-Port Stackable Switches

DATA SHEET

Key Benefits



- Stackable Gigabit to the Desktop at pricing similar to 10/100
- Available 10-Gigabit connectivity
- Manage up to 384 ports with a single IP address
- Limited Lifetime Warranty

Scalability

Enhanced Layer 2 10/100/1000 LAN switching solution delivers scalable wirespeed Gigabit performance, with integrated stacking up to eight units high, or 384 Gigabit ports, with high-bandwidth 40Gbps stacking. Stack-wide link aggregation enables high-performance connectivity to the core of the network, with up to eight ports from different units aggregated together to improve resiliency and uptime.

Performance

24 or 48 built-in copper Gigabit ports, including four dual-purpose ports supporting copper links or SFP adapters for easy, flexible connection to fiber-based Gigabit media.

Port-based rate-limiting enables the bandwidth on each port to be restricted, so power users can receive the full bandwidth available while non-key users can be throttled down, preserving network bandwidth and allowing maximum control of network resources. Built-in packet prioritization gives optimal performance to real-time applications such as voice and video.

Future Protection

Gigabit to the desk prepares your network for the future at prices comparable to those of some 10/100 switches. Tri-speed operation at 10-, 100-, and 1000Mbps allows easy migration to Gigabit speeds.

Investment protection is further enhanced with switching silicon designed to support multilayer switching, and a module slot that supports a single-port 10-Gigabit Ethernet module, with CX-4, LR, or ER XENPAK ports that can be used to connect back to the network core.

Ease of Use

Automatic selection of the optimal speed and duplex mode on all ports prevents mis-configuration of the network. Switch ports also detect and adjust to cross-over or straight-through cable connections— via auto MDI/MDIX—eliminating the need for specific cables.

Security

IEEE 802.1X network login and RADIUS Authenticated Device Access (RADA) enforce access control on every switch port. Auto VLAN assignment, in conjunction with 802.1X and MAC address based authentication, enables further control over access to network resources.

Management of the switch can be implemented using Secure Shell (SSH) and Secure Sockets Layer (SSL / HTTPS) encryption, preventing unauthorized remote access to the switch over IP networks or from a web browser.

Powerful Management

Comprehensive support within the 3Com management application software suite, including the standalone packages 3Com Enterprise Management Suite or 3Com Network Director. 3Com Network Supervisor may also be used in smaller networks.

Service

3Com products are backed by 3Com Global Services and authorized partners with demonstrated expertise in network assessment, implementation, and maintenance. Ask about which 3Com Network Health Check, installation services, and maintenance service packages are available in your area.

Limited Lifetime Hardware Warranty

Limited Lifetime Hardware Replacement. See www.3com.com/warranty for details.

Service and Support

3Com products are backed by 3Com Global Services and authorized partners with demonstrated expertise in network assessment, implementation and maintenance. These services fill resource gaps and help manage enterprise support requirements.

3Com® SuperStack® 3 Switch 3800 family switches deliver wirespeed Gigabit Ethernet switching, with ten times the performance of 10/100 desktop switching but at similar prices. Tri-speed operation of the switch enables backward compatibility with existing devices, such as printers, while still allowing new PC's and servers to operate at their maximum potential.

The two SuperStack 3 Switch 3870 models are stackable, up to eight units high, for impressive scalability. The switches come with integrated dual full duplex 10Gbps stacking ports on the back of the unit, providing a total stacked capacity of 40Gbps, and support for single-entity IP management of all units in the stack.


These switches also have notable investment protection capabilities. Along with the built-in 10Gbps stacking ports, each Switch 3870 also has an expansion slot capable of supporting an additional 10Gbps full duplex (20Gbps total) high-speed Ethernet connection. This enables the 156Gbps switching capacity to provide wirespeed switching on all ports.

Concerned about network security? SuperStack 3 Switch 3870s support IEEE 802.1X network login to help ensure all users are authorized before being granted access to the network. RADIUS Authenticated Device Access (RADA) and Auto VLAN assignment capabilities enable further control over access to network resources.

Why Gigabit to the Desk?

It is time to consider "Gigabit to the desk" as an alternative to 10/100 switching:

- Give users a 10x improvement in performance. Reduce network latency. Prepare the network for supporting high quality video and voice communication.
- Pricing for Gigabit is closer and closer to that of 10/100 switching, making it wise to make the move now to the higher speed.
- Gigabit speeds are increasingly being supported by new servers and workstations. Prepare the network to deliver optimum speed.
- Migration is easy, with 10-, 100-, and 1000Mbps operation that automatically adjusts to the maximum available speed. No worries about backward compatibility.

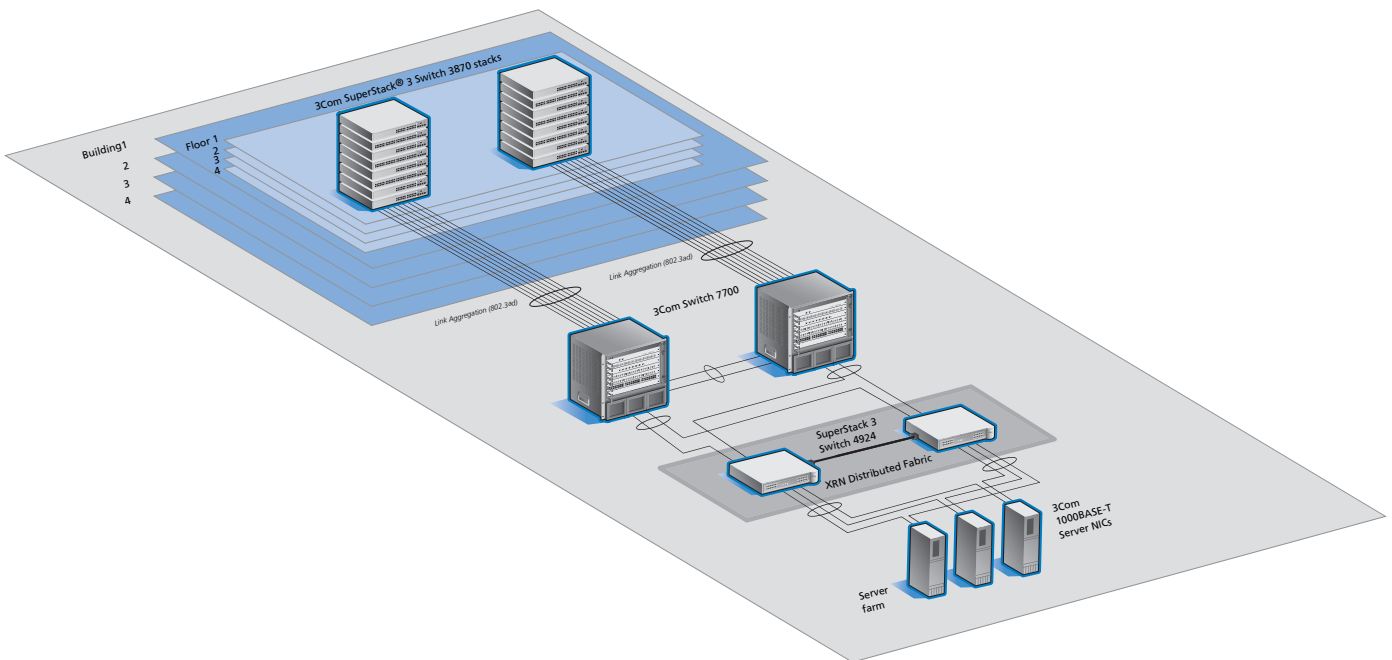

Features

PERFORMANCE	
Switching capacity	SuperStack 3 Switch 3870 24-port, 108 Gbps; Switch 3870 48-port, 156 Gbps
Forwarding rate	24-port, 80 Mpps; 48-port, 115 Mpps Store-and-forward switching
LAYER 2 SWITCHING	
MAC Address	16K MAC addresses 1K Secure MAC addresses 9K Jumbo Frame support
VLAN	255 VLANs (IEEE 802.1Q)
Link Aggregation	IEEE 802.3ad (LACP), Gigabit ports only 32 trunk groups (up to 8 ports in each), trunking across stacked units
Auto-negotiation	Auto-negotiation of port speed, duplex, and connection (MDI/MDIX)
Traffic control	IEEE 802.3x full-duplex flow control Back pressure flow control for half-duplex Broadcast Storm Control (500-200,000 pps limit)
Spanning Tree Protocol / Rapid Spanning Tree Protocol	IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) Backward-compatible with Spanning Tree Protocol (STP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) Fast-start mode Spanning tree enable/disable per port
Multicast Snooping	Filtering for 64 multicast groups Internet Group Management Protocol (IGMP) v1 and v2 IGMP Querier
STACKING	
	Switched 40Gbps on each switch Up to eight units high, with single IP address for stack management Resilient loop back Hot-swap units
CONVERGENCE	
Priority Queues	Eight hardware queues per port Strict priority Weighted Round Robin queuing
Traffic Prioritization	Remarking of packets based on priority: <ul style="list-style-type: none"> • Diffserv Code Point (DSCP) • IEEE 802.1p Class of Service (CoS) • TCP/UDP destination port number • Default port priority • Auto classification of 3Com NBX® telephony traffic
Bandwidth Management	Port-based bandwidth management: <ul style="list-style-type: none"> • 1 Mbps increments (Gigabit ports)
SECURITY	
Network Login	IEEE 802.1X user authentication: <ul style="list-style-type: none"> • RADIUS authentication • Secure Mode (locks MAC address) RADIUS Authenticated Device Access (RADA): <ul style="list-style-type: none"> • Authenticate devices based on MAC address against RADIUS server • Authenticate multiple devices per port • Automatic assignment of VLANs and QoS to a port specific to the devices attached
Packet Filtering	Port-based Access Control Lists (ACLs): <ul style="list-style-type: none"> • Filtered on destination IP address / mask
Switch Protocol Security	MD5 cipher-text authentication and clear-text authentication
Switch Management	RADIUS management of switch passwords Trusted IP Management Addresses Telnet: SSH v2 (56bit DES); SSL (HTTPS): 40 Bit, 56 Bit DES

Features, continued

RESILIENCY	
	Support for 3Com Advanced Redundant Power Supply; provides backup power to the switch Dual software images Backup and restore of switch settings
MANAGEMENT	
Remote Management	Simple Network Management Protocol (SNMP) v1, v2
Software	Dual software images Backup and restore Trivial File Transfer Protocol (TFTP) configuration: upload/download TFTP agent: upload
Configuration	Command line Serial (RJ-45 supplied) Telnet Web-based SNMP
Time	Simple Network Time Protocol (SNTP)
Mirror port / Roving Analysis Port (RAP)	One-to-one (across stack)
Remote Monitoring (RMON)	Four groups: statistics, history, alarm, and events
IP address allocation	Dynamic Host Configuration Protocol (DHCP) Manual
Switch access levels	5 user accounts
Remote GUI management	3Com Network Supervisor for basic, turn-key network management for small and medium businesses (copy provided with product) <ul style="list-style-type: none"> • Topology discovery • Change management reporting • Capacity planning • Event logging • Fault identification and troubleshooting • Utilization monitoring Other 3Com Management Applications: <ul style="list-style-type: none"> • 3Com Network Director for comprehensive, turn-key network management for the enterprise. • 3Com Enterprise Management Suite for flexible, extensible management in advanced enterprise IT environments
OPTIONAL SERVICE AND SUPPORT	
Network Health Check	An activity-auditing service focused on improving network performance and productivity Includes traffic monitoring, utilization analysis, problem identification, and asset deployment recommendations Extensive report provides blueprint for action
Network Design	Includes review of business plan, extensive inventory of requirements, and complete design document specifying implementation details
Network Installation	Experts set up and configure equipment and integrate technologies to maximize functionality and minimize business disruption Service may include physical site survey and network design and engineering based on evaluation of business objectives
Project Management	Provides extra focus and resources that special projects demand 3Com engineer(s) manage entire process from initial specifications to post-project review Using structured methodology, requirements are identified, projects planned, and progress of implementation activities tracked
3Com Guardian SM Maintenance Service	Provides comprehensive onsite support, including advance hardware replacement, telephone technical support, and software upgrades: <ul style="list-style-type: none"> • Telephone support backed by powerful call-tracking database and replication laboratory • Software upgrades ensure access to pertinent patches
3Com Express SM Maintenance Service	Benefits customers who prefer to maintain own hardware Bolsters in-house resources with convenient and speedy access to 3Com hardware replacements, software upgrades, and telephone support

Specifications

All information in this section is relevant to both models of the 3Com SuperStack 3 Switch 3870, unless stated otherwise.

Port Capacities

24-Port:

20 10/100/1000 ports

4 dual-personality 10/100/1000 or SFP Gigabit ports

48-Port:

44 10/100/1000 ports

4 dual-personality 10/100/1000 or SFP Gigabit ports

Dimensions

Height: 45 mm (1.7 in or 1U)

Width: 440 mm (17.3 in)

Depth: 415 mm (16.4 in)

Weight: 5.0 kg (11.0 lbs)

Performance

24-port:

Bandwidth: 108 Gbps

Throughput: 80 Mpps

48-port:

Bandwidth: 156 Gbps

Throughput: 115 Mpps

Power Supply

Input voltage: 100-240 VAC autoranging

Operating frequency: 47-63 Hz

Current Rating: 2A maximum

Heat dissipation: 717 BTU (210W)

CPU

MPC8245 (466Mhz)

32MB Flash memory

128MB Processor memory

Packet Buffer Memory

24-port: 2MB

48-port: 4MB

Environmental Requirements

Operating temperature:

0° to 40°C (32° to 104°F)

Storage temperature:

-40° to 70°C (-40° to 158°F)

Humidity:

10% to 90% non-condensing

MTBF

24-port:

31 years (268,000 hours)

48-port:

21 years (184,000 hours)

Industry Standards Supported

Ethernet Protocols

IEEE 802.1p (CoS)

IEEE 802.1Q (VLANs)

IEEE 802.1s (MSTP)

IEEE 802.1w (RSTP)

IEEE 802.1X (Security)

IEEE 802.3ab (Copper Gigabit)

IEEE 802.3ad (Link Aggregation)

IEEE 802.3ae (10G Ethernet)

IEEE 802.3i (10BASE-T)

IEEE 802.3u (Fast Ethernet)

IEEE 802.3x (Flow Control)

IEEE 802.3z (Fiber Gigabit)

Administration Protocols

RFC 1812 (IPv4)

RFC 783 (TFTP)

RFC 768 (UDP)

RFC 791 (IP)

RFC 793 (TCP)

RFC 2474 (DiffServ)

RFC 2131 (DHCP)

RFC 2138 (Radius Authentication)

Management, including MIBs Supported

RFC 1157 (SNMP v1/v2c)

RFC 1213 (MIB II)

RFC 1398 Ethernet MIB

RFC 1493 (Bridge MIB)

RFC 1573 (Private IF MIB)

RFC 1757 RMON MIB

RFC 2011 IP-MIB

RFC 2012 TCP-MIB

RFC 2013 UDP-MIB

RFC 2037 Entity MIB

RFC 2618 (RADIUS Authentication Client MIB)

RFC 2665 Ethernet-MIB

RFC 2674P P-BRIDGE-MIB

RFC 2674Q Q-BRIDGE-MIB

RFC 2737 Entity MIB

RFC 2819 RMON MIB

RFC 2863 IF-MIB

IEEE8021-PAE-MIB (IEEE) (Network Login)

Emissions / Agency Approvals

CISPR 22: 1995; Class A

FCC Part 15 subpart B, Class A

EN 55022: 1998; Class A

ICES -003 Class A

AS/NZS 3548 Class A

EN 61000-3-2: 2000

EN 61000-3-3: 1995 +A1

Immunity

EN 55024: 1998

Safety Agency Certifications

UL 60950-1

IEC 60950: 2001; all national deviations

EN 60950: 2001; all national deviations

CSA 22.2 # 60950-00

Management

SNMP, Web, and Telnet support

RMON-1

RMON Groups: Statistics, History, Alarms and Events

GUI management with 3Com Network Supervisor and other 3Com management offerings

Warranty

Limited Lifetime Hardware Warranty. See

www.3com.com/warranty for details.

Other Benefits

Other Service Benefits: Advance hardware replacement with same day shipment for North America and Western Europe. Next day shipment for rest of world. Calls must be received by published cut-off times.

90 days of telephone technical support. Limited software updates.

See www.3com.com/warranty for more detail.

Register products at <http://eSupport.3com.com/>.

Service

Americas:

http://www.3com.com/products/en_US/global_services/

International:

<http://emea.3com.com/globalservices>

Ordering Information

PRODUCT DESCRIPTION	3COM SKU
Switches	
3Com SuperStack 3 Switch 3870, 24-Port (20-port 10/100/1000 switch with four dual-personality 10/100/1000 or SFP ports)	3CR17450-91
3Com SuperStack 3 Switch 3870, 48-Port (44-port 10/100/1000 switch with four dual-personality 10/100/1000 or SFP ports)	3CR17451-91
Modules	
3Com SuperStack 3 Switch 3870 1-Port 10GBASE-X Module (XENPAK)	3C17461
Transceivers	
3Com 1000BASE-SX SFP (multimode, LC connector)	3CSFP91
3Com 1000BASE-LX SFP (multimode, LC connector)	3CSFP92
3Com 1000BASE-LH70 (70km) SFP (multimode, LC connector)	3CSFP97
3Com 10GBASE-LR XENPAK (single-mode, SC connectors)	3CXENPAK92
3Com 10GBASE-CX4 XENPAK (Infiniband 4X connector)	3CXENPAK95
3Com 10GBASE-ER XENPAK (single-mode, SC connectors)	3CXENPAK96
Redundant Power	
3Com SuperStack 3 Advanced Redundant Power System	3C16071B
3Com SuperStack 3 Advanced Redundant Power System, 325W Power Module Type 3	3C16075
Cables	
3Com SuperStack 3 Switch 3870 Stacking Cable	3C17462
3Com SuperStack 3 Switch 3870 Resilient Stacking Cable	3C17463



3Com Corporation, Corporate Headquarters, 350 Campus Drive, Marlborough, MA 01752-3064

To learn more about 3Com solutions, visit www.3com.com. 3Com is publicly traded on NASDAQ under the symbol COMS.

Copyright © 2005 3Com Corporation. All rights reserved. 3Com, the 3Com logo, SuperStack, and NBX are registered trademarks, and Guardian and Express are service marks, of 3Com Corporation. All other company and product names may be trademarks of their respective companies. While every effort is made to ensure the information given is accurate, 3Com does not accept liability for any errors or mistakes which may arise. All specifications are subject to change without notice. 400845-006 06/05